

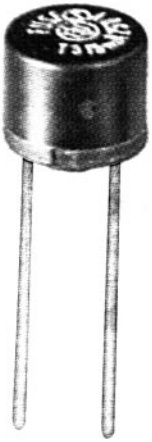


micro-fusibili MT ritardati 250V




Corpo termoplastico autoestinguente nero

Potere di interruzione 35A~

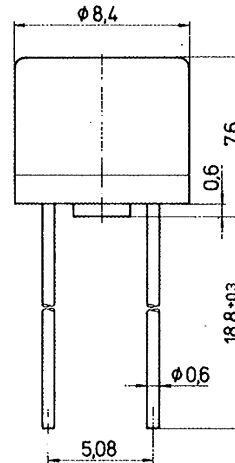

CORRENTE NOMINALE **I^t A²S** **CADUTA TENSIONE mV**

50 mA	0,09	500
63 mA	0,098	480
80 mA	0,16	400
100 mA	0,02	350
125 mA	0,39	300
160 mA	0,075	280
200 mA	0,2	260
250 mA	0,36	240
315 mA	0,58	220
400 mA	1,8	200
500 mA	2,5	190
630 mA	4	180
800 mA	6,5	160
1 A	8	140
1,25 A	14	130
1,6 A	22	120
2 A	26	100
2,5 A	38	100
3,15 A	60	100
4 A	67	100

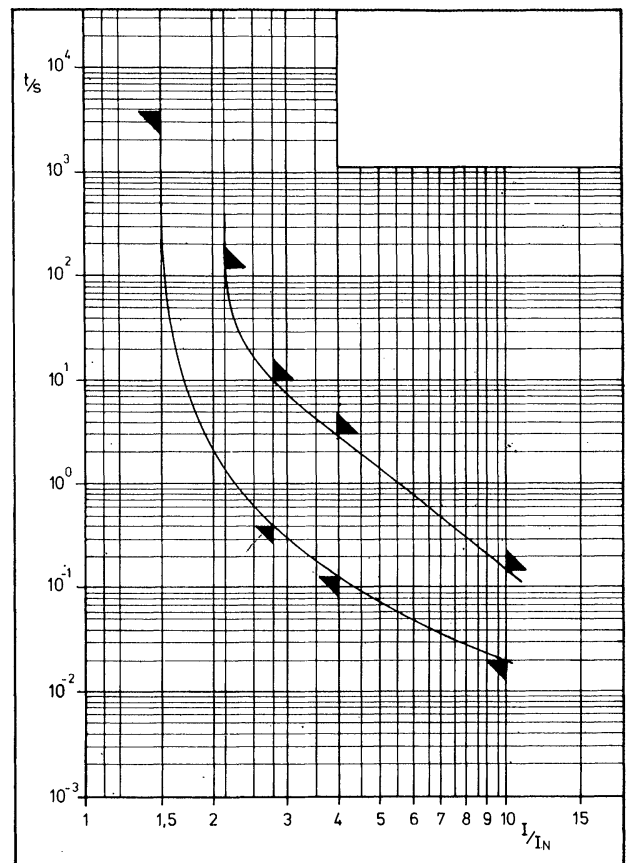

Caratteristiche di fusione

Corrente nominale I _n	Corrente di prova				
	1,5xI _n	2,1xI _n	2,75xI _n	4xI _n	10xI _n
50 mA - 4 A	> 1 h	< 30 min	400 ms - 10 s	150 ms - 3 s	20 ms - 150 ms